



Size Range 302 x 334 x 298 mm 11,89 x 13,14 x 11,73 "
AC HIGH PERFORMANCES CENTRIFUGAL FAN

TECHNICAL DATA

Characteristics

- Weight: 19 Kg / 41,99 Lb
- Housing in Aluminium
- Turbine in metal
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -54 / +85°C
- Connection: Leads
- GAM T1 listed
- IP20



Options

- Speed sensor
- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- Safety switch

ELECTRICAL AND AERAILIC DATA

Part Number	Voltage	Frequency	Nb Phases	Airflow		Pressure		Nominal speed RPM	Noise level LP dBA	Nominal current A	Starting current A	power W	Capacitor µF
	V	Hz		l/s	CFM	mm H ₂ o	inch H ₂ o						
711CHB016DC13	220	50	3	370,00	784,40	135,00	5,31	2850	79	3,00	17,00	1000,00	
	380	50	3	370,00	784,40	135,00	5,31	2850	79	1,75	10,00	1000,00	
	220	60	3	420,00	890,40	190,00	7,48	3200	82	4,30	16,00	1550,00	
	380	60	3	420,00	890,40	190,00	7,48	3200	82	2,50	9,50	1550,00	
711CHB116DC13	220	50	3	370,00	784,40	135,00	5,31	2850	79	3,00	17,00	1000,00	
	380	50	3	370,00	784,40	135,00	5,31	2850	79	1,75	10,00	1000,00	
	220	60	3	420,00	890,40	190,00	7,48	3200	82	4,30	16,00	1550,00	
	380	60	3	420,00	890,40	190,00	7,48	3200	82	2,50	9,50	1550,00	

DRAWING AND AIRFLOW CURVE

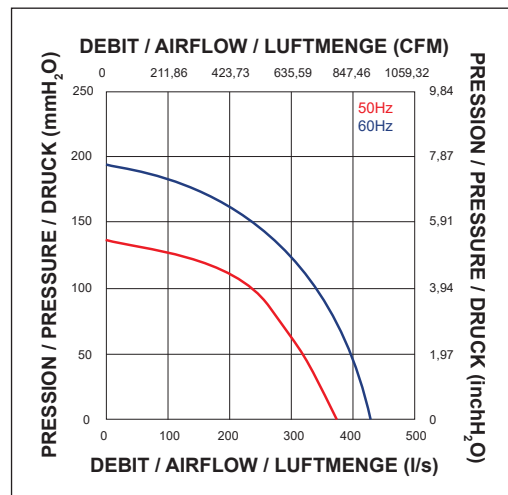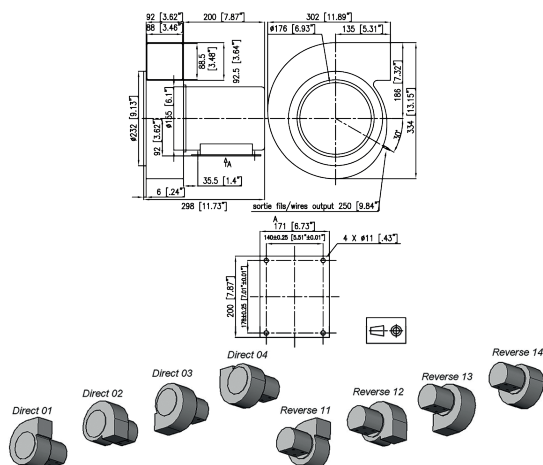

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.