



Size Range 113 x 113 x 88,5 mm 4,45 x 4,45 x 3,48 "
400Hz HIGH PERFORMANCES AXIAL FAN

TECHNICAL DATA

Characteristics

- Weight: 0,94 Kg / 2,08 Lb
- Housing in Aluminium
- Impeller in metal
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -54 / +85°C
- Connection: Leads
- IP40



Options

- Speed sensor
- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages

ELECTRICAL AND AERAULIC DATA

Part Number	Voltage	Frequency	Nb Phases	Airflow		Pressure		Nominal speed RPM	Noise level LP dBA	Nominal current A	Starting current A	power W	Capacitor µF
	V	Hz		l/s	CFM	mm H ₂ o	inch H ₂ o						
80TV0562C13 NR	115	400	3	71,00	150,52	23,00	0,91	5200	61	0,44	0,65	52,00	
	115	400	1	69,00	146,28	22,00	0,87	5000	61	0,45	0,54	47,00	1,47
80TV0560C13 NR	200	400	3	71,00	150,52	23,00	0,91	5200	61	0,25	0,37	52,00	
	200	400	1	69,00	146,28	22,00	0,87	5000	61	0,26	0,31	47,00	0,47
80TN0562C13 NR	115	400	3	135,00	286,20	83,00	3,27	9700	76	1,15	2,80	153,00	
	115	400	1	135,00	286,20	83,00	3,27	9700	76	1,40	2,35	147,00	4,70
80TN0560C13 NR	200	400	3	135,00	286,20	83,00	3,27	9700	76	0,65	1,60	153,00	
	200	400	1	135,00	286,20	83,00	3,27	9700	76	0,79	1,35	147,00	1,47

DRAWING AND AIRFLOW CURVE

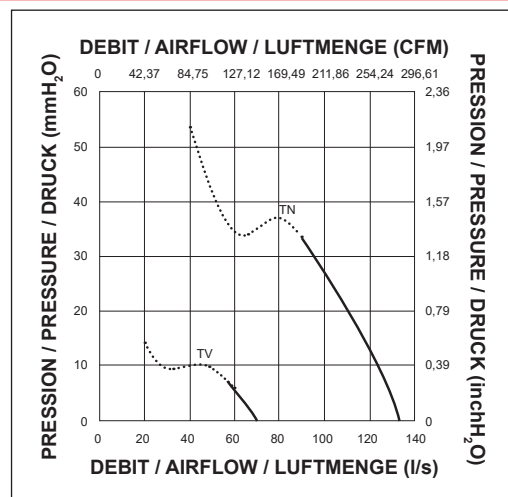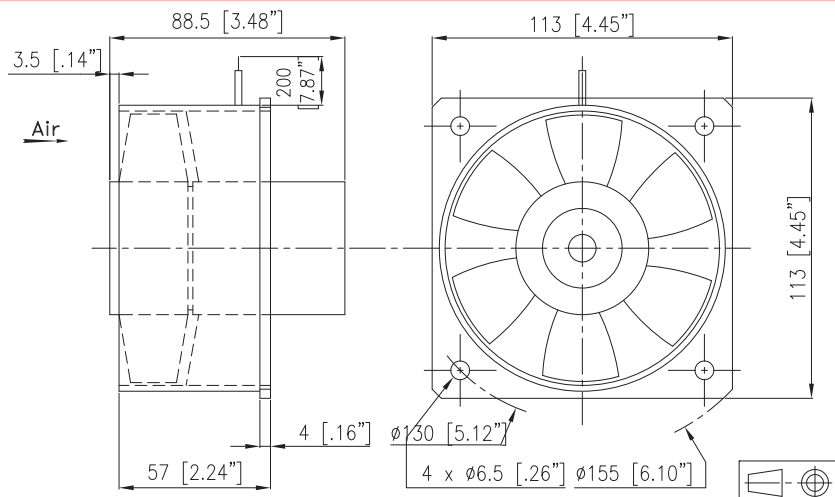

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.